



ARES CHROME-PLATED ELECTRIC

height 1462 mm, length 580 mm. Chrome-plated finish (cod. 50).






Technical features:


- electric steel towel warmer radiator
- horizontal elements with round tubes 23 mm diameter
- side manifolds with a 40x30 mm semioval section
- power cable, length 1200 mm, schuko plug
- complete with thermal liquid

Price included:


- 3 chrome-plated infratube for wall fixing

Finishes available	Surcharge
Chrome-plated (cod. 50)	

ELECTRIC HEATERS AVAILABLE			WIFI CONTROL *
<p>ELECTRIC HEATING ELEMENT WITH ON/OFF SWITCH (TYPE I)</p>  <p>Electric heating element with built-in ON/OFF switch. Insulation class: I. Protection index: IP54. The electronics are supplied in glossy chrome color.</p>	<p>ELECTRIC HEATING ELEMENT WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (TYPE K)</p>  <p>Electric heating element with 4-pole connector with electronic thermostat for regulating the temperature of the internal fluid. Insulation class: I. Protection index: IP44. The electronics are supplied in glossy chrome color.</p>	<p>ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)</p>  <p>Digital electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP44. The electronics are supplied in glossy chrome color.</p> <p>ECO</p>	<p>ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)</p>  <p>Control your radiator remotely using the IRSAP NOW app available from:</p> <p>Available on the </p> <p>Compatible with the systems:</p> <p> </p> <p>WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24.</p> <p>* Available only for UE and CH.</p> <p>ECO</p> <p>View the online guides at: now.irsap.com</p> 

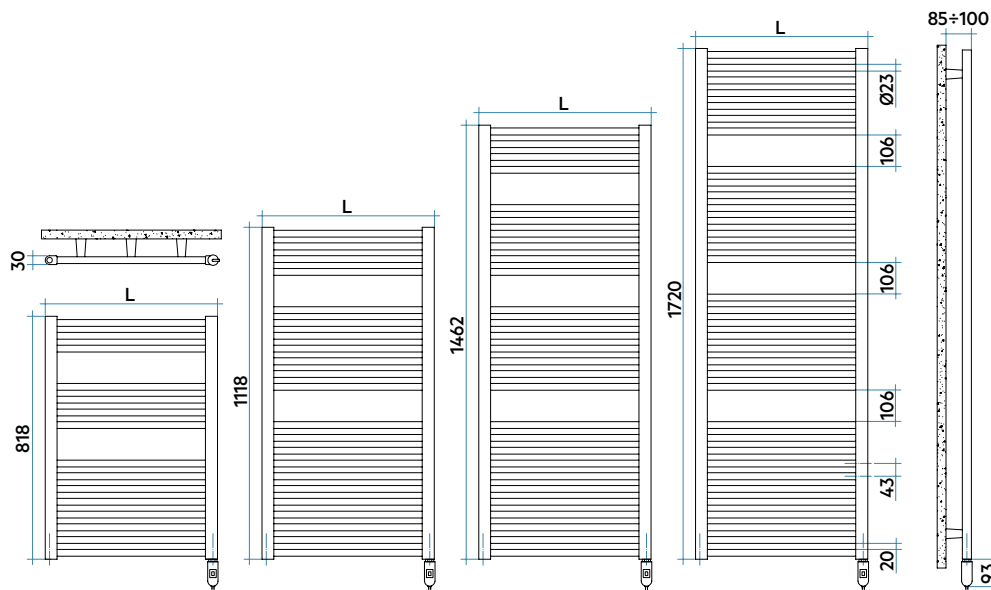


ARES CHROME-PLATED ELECTRIC WITH SWITCH (I)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power
						Watt
818 - 15 rails - 2 espaces	EIS058 I 50 IR 01 NNN	30	818	580	10,1	300
1118 - 22 rails - 2 espaces	EIM050 I 50 IR 01 NNN	30	1118	500	12,8	300
1462 - 28 rails - 3 espaces	EILO50 I 50 IR 01 NNN	30	1462	500	16,3	400
1720 - 34 rails - 3 espaces	EIG050 I 50 IR 01 NNN	30	1720	500	19,4	400
	EIG058 I 50 IR 01 NNN	30	1720	580	21,7	700

ARES CHROME-PLATED ELECTRIC WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (K)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power
						Watt
818 - 15 rails - 2 espaces	EIS058 K 50 IR 01 NNN	30	818	580	9,9	300
1118 - 22 rails - 2 espaces	EIM050 K 50 IR 01 NNN	30	1118	500	12,6	300
1462 - 28 rails - 3 espaces	EILO50 K 50 IR 01 NNN	30	1462	500	16,3	400
1720 - 34 rails - 3 espaces	EIG050 K 50 IR 01 NNN	30	1720	500	19,4	400
	EIG058 K 50 IR 01 NNN	30	1720	580	21,7	700

ARES CHROME-PLATED ELECTRIC WITH ELECTRONIC CONTROL (H)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power
						Watt
818 - 15 rails - 2 espaces	EIS058 H 50 IR 01 NNN	30	818	580	10,3	300
1118 - 22 rails - 2 espaces	EIM050 H 50 IR 01 NNN	30	1118	500	13,2	300
1462 - 28 rails - 3 espaces	EILO50 H 50 IR 01 NNN	30	1462	500	16,7	400
1720 - 34 rails - 3 espaces	EIG050 H 50 IR 01 NNN	30	1720	500	19,8	400
	EIG058 H 50 IR 01 NNN	30	1720	580	22,0	700

ARES CHROME-PLATED ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power
						Watt
818 - 15 rails - 2 espaces	EIS058 E 50 IR 01 NNN	30	818	580	10,6	300
1118 - 22 rails - 2 espaces	EIM050 E 50 IR 01 NNN	30	1118	500	13,2	300
1462 - 28 rails - 3 espaces	EILO50 E 50 IR 01 NNN	30	1462	500	16,8	400
1720 - 34 rails - 3 espaces	EIG050 E 50 IR 01 NNN	30	1720	500	19,9	400
	EIG058 E 50 IR 01 NNN	30	1720	580	22,2	700

Key Codes

