



TOLÉ CHROME-PLATED

height 1902 mm, length 581 mm. Chrome-plated finish (cod. 50).



Technical features:


- aluminum towel radiator
- horizontal tube elements of 22x22 mm square section
- square section side manifolds 25x25 mm
- 1/2" Gas right threading
- maximum working pressure 4 bar
- maximum working temperature 95°C

Price included:


- angle pattern valve and lockshield valve assembly complete with copper fitting (diameters: 12, 14, 15 mm)
- kit of pipe covers (suitable for pipes up to 16 mm thick)
- 4 wall fixing brackets
- 1/2" air vent chrome-plated

| Finishes available | Surcharge |
|-------------------------|-----------|
| Chrome-plated (cod. 50) | |


Standard Connections



Connection dimensions with IRSAP valves



Valve and lockshield in chrome-plated aluminium provided for TOLÉ radiators.

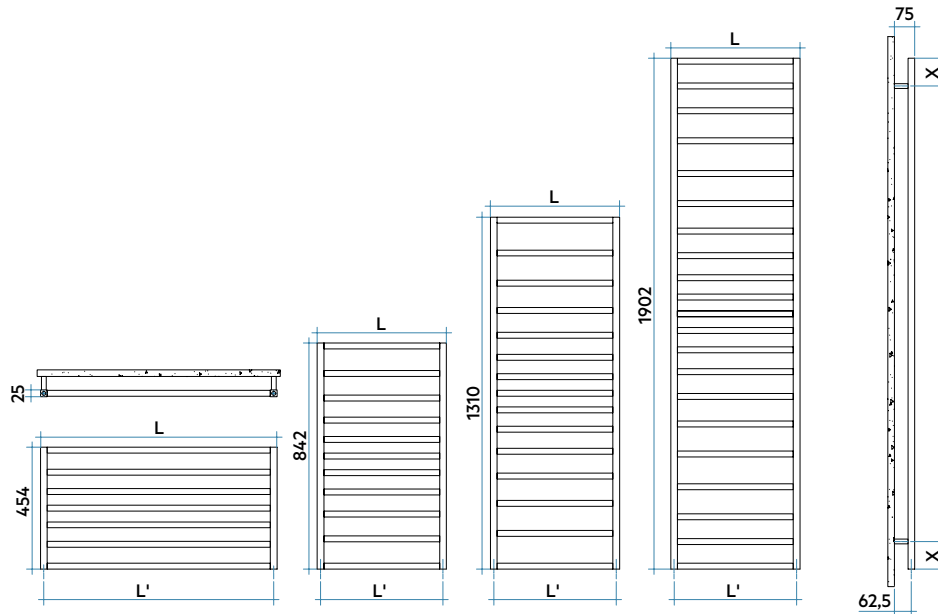

| H mm | X mm |
|------|------|
| 454 | 93 |
| 842 | 113 |
| 1310 | 133 |
| 1902 | 103 |

| X mm | L mm | L' mm |
|-------------------|------|-------|
| 842/1310/1902 | 481 | 456 |
| 454/842/1310/1902 | 525 | 500 |
| 842/1310/1902 | 581 | 556 |
| 454 | 881 | 856 |



| Model | Code | Depth | Height | Width | Conn. centre | Weight | Cap. | Thermal Power | | | | Exp. n. | |
|------------------|------------------------------|-------|--------|-------|--------------|--------|------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|---------|-------|
| | | | | | | | | $\Delta t=50^{\circ}\text{C}$ | $\Delta t=40^{\circ}\text{C}$ | $\Delta t=30^{\circ}\text{C}$ | $\Delta t=20^{\circ}\text{C}$ | | |
| | | mm | mm | L mm | L' mm | Kg | lt | Btu/h | Watt | Watt | Watt (*) | Watt | |
| 454 7 rails | TCS052 B 50 IR 01 NNN | 25 | 454 | 525 | 500 | 3,0 | 1,2 | 513 | 150 | 114 | 79 | 48 | 1,250 |
| | TCS088 B 50 IR 01 NNN | 25 | 454 | 881 | 856 | 4,4 | 1,9 | 811 | 238 | 181 | 128 | 78 | 1,220 |
| 842 11 rails | TCPO48 B 50 IR 01 NNN | 25 | 842 | 481 | 456 | 4,7 | 1,8 | 788 | 231 | 175 | 122 | 73 | 1,250 |
| | TCPO52 B 50 IR 01 NNN | 25 | 842 | 525 | 500 | 5,0 | 1,9 | 847 | 248 | 188 | 131 | 79 | 1,250 |
| | TCPO58 B 50 IR 01 NNN | 25 | 842 | 581 | 556 | 5,3 | 2,1 | 932 | 273 | 207 | 145 | 88 | 1,240 |
| 1310 15 rails | TCMO48 B 50 IR 01 NNN | 25 | 1310 | 481 | 456 | 6,7 | 2,5 | 1174 | 344 | 261 | 183 | 111 | 1,240 |
| | TCMO52 B 50 IR 01 NNN | 25 | 1310 | 525 | 500 | 7,1 | 2,7 | 1257 | 368 | 280 | 196 | 119 | 1,240 |
| | TCMO58 B 50 IR 01 NNN | 25 | 1310 | 581 | 556 | 7,5 | 2,9 | 1352 | 396 | 301 | 211 | 128 | 1,230 |
| 1902 21 rails | TCGO48 B 50 IR 01 NNN | 25 | 1902 | 481 | 456 | 9,5 | 3,5 | 1708 | 501 | 379 | 265 | 159 | 1,250 |
| | TCGO52 B 50 IR 01 NNN | 25 | 1902 | 525 | 500 | 10,0 | 3,8 | 1828 | 536 | 405 | 283 | 171 | 1,250 |
| | TCGO58 B 50 IR 01 NNN | 25 | 1902 | 581 | 556 | 10,7 | 4,1 | 1973 | 578 | 438 | 306 | 184 | 1,250 |

(*) Thanks to the high performance of Irsap TOLÉ radiators, the ideal Δt for low temperature projects is Δt at 30°C .
For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Key Codes

